

**Used machine matec-30 HV**

- well-kept condition
- regularly maintained
- for precision manufacturing

The **matec-30 HV** has been conceived for single-part and series production of high volume for machine and steel building industries.



The machine is made for the machining of 5 sides to the highest specification, parallelism and planeness of the workpiece.



Note:  
The photos show options, which are not included in delivery.

Price on request!

The machine is equipped as follows and on short delivery:

Year of building: 1997 - MA0079

Working area  
X-Axis 2.000 mm  
Y-Axis 700 mm  
Z-Axis 800 mm

Size of table  
X= 2.500 mm  
Y= 750 mm

Control Bosch CC220

3D-Interpolation / Thread milling

Electronic handwheel

1-axis swivel head  
with 1° gearing

Preparation for rotary table

Tool magazine with 36 places

Tool handling fixture  
SK 40 - DIN 69871

Motor spindle 9.000 U/min  
Power max. 16 kW  
Torque max. 191 Nm

Partition wall for double work station  
system

Total cladding of working area

Chip conveyor with integrated  
coolant supply


**Used machine matec-30 HV**

- well-kept condition
- regularly maintained
- for precision manufacturing

The **matec-30 HV** has been conceived for single-part and series production of high volume for machine and steel building industries.



The machine is made for the machining of 5 sides to the highest specification, parallelism and planeness of the workpiece.

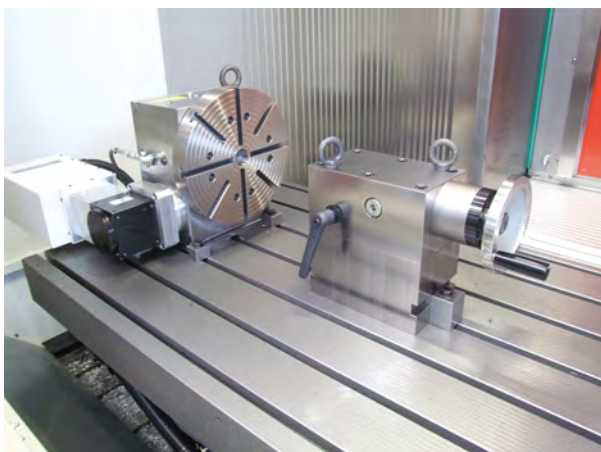

Note:  
The photos show options, which are not included in delivery.

Price on request!

The machine is equipped as follows and on short delivery:

Year of building: 1997 - MA0096

Working area  
X-Axis 2.000 mm  
Y-Axis 600 mm  
Z-Axis 800 mm

Size of table  
X= 2.500 mm  
Y= 635 mm

Control Bosch CC 220

3D-Interpolation / Thread milling

1-axis swivel head  
with 1° gearing

NC rotary table Ø 320mm face plate  
vertical  
Precision ± 15"

Tailstock mechanical MK3

Tool magazine with 48 places

Lubrication inner supply 20 bar

Tool handling fixture  
SK 40 - DIN 69871

Motorspindle 9.000 U/min  
Power max. 30 kW  
Torque max. 191 Nm

Working time meter

Partition wall for double work station  
system

Total cladding of working area

Chip conveyor with integrated  
coolant supply

Cooling unit for electrical switch cabinet